
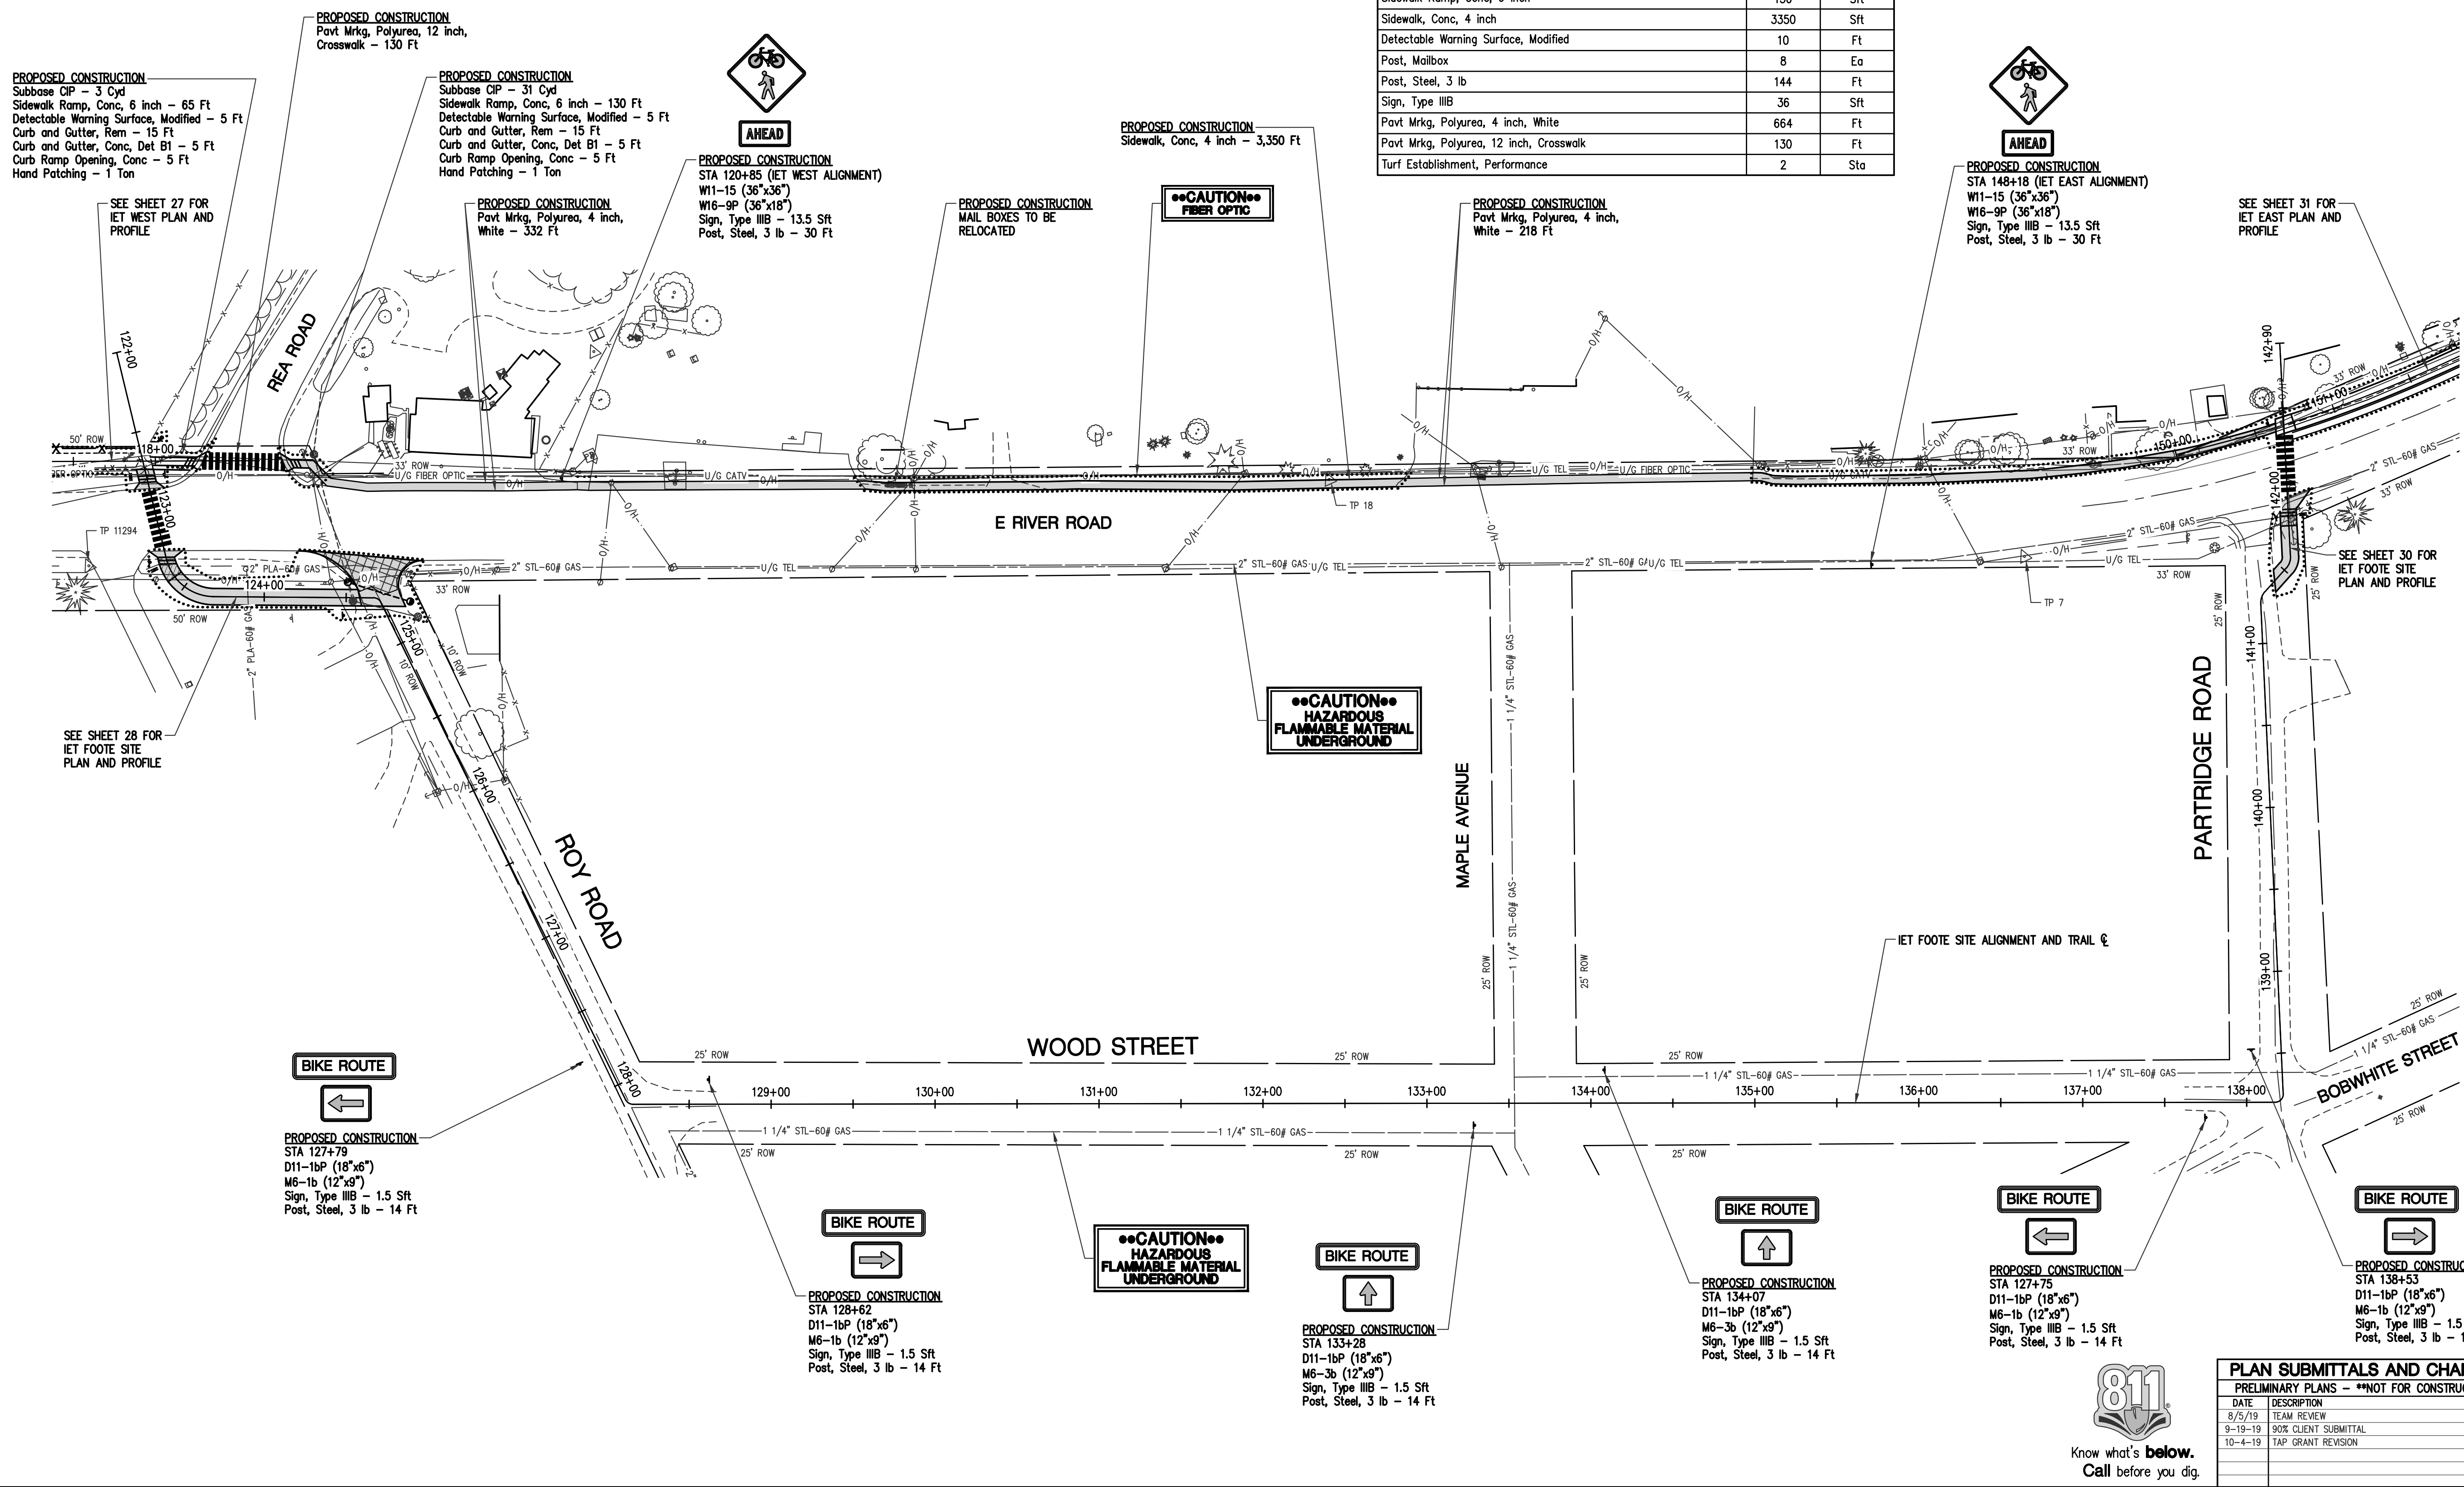


SHEET QUANTITIES CATEGORY 1 - PARTICIPATING		
DESCRIPTION	QUANTITY	UNITS
Curb and Gutter, Rem	30	Ft
Subbase, CIP	34	Cyd
Hand Patching	2	Ton
Curb and Gutter, Conc, Det B1	10	Ft
Curb Ramp Opening, Conc	10	Ft
Sidewalk Ramp, Conc, 6 inch	130	Sft
Sidewalk, Conc, 4 inch	3350	Sft
Detectable Warning Surface, Modified	10	Ft
Post, Mailbox	8	Ea
Post, Steel, 3 lb	144	Ft
Sign, Type III B	36	Sft
Pav't Mrkg, Polyurea, 4 inch, White	664	Ft
Pav't Mrkg, Polyurea, 12 inch, Crosswalk	130	Ft
Turf Establishment, Performance	2	Sta

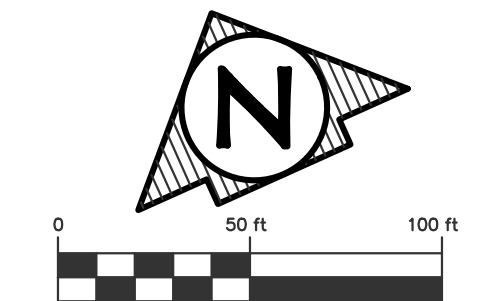

**PROPOSED CONSTRUCTION**  
Subbase CIP - 3 Cyd  
Sidewalk Ramp, Conc, 6 inch - 65 Ft  
Detectable Warning Surface, Modified - 5 Ft  
Curb and Gutter, Rem - 15 Ft  
Curb and Gutter, Conc, Det B1 - 5 Ft  
Curb Ramp Opening, Conc - 5 Ft  
Hand Patching - 1 Ton

**PROPOSED CONSTRUCTION**  
Pav't Mrkg, Polyurea, 12 inch,  
Crosswalk - 130 Ft

**PROPOSED CONSTRUCTION**  
Subbase CIP - 31 Cyd  
Sidewalk Ramp, Conc, 6 inch - 130 Ft  
Detectable Warning Surface, Modified - 5 Ft  
Curb and Gutter, Rem - 15 Ft  
Curb and Gutter, Conc, Det B1 - 5 Ft  
Curb Ramp Opening, Conc - 5 Ft  
Hand Patching - 1 Ton

**PROPOSED CONSTRUCTION**  
Pav't Mrkg, Polyurea, 4 inch,  
White - 332 Ft

**PROPOSED CONSTRUCTION**  
STA 120+85 (IET WEST ALIGNMENT)  
W11-15 (36"x36")  
W16-9P (36"x18")  
Sign, Type III B - 13.5 Sft  
Post, Steel, 3 lb - 30 Ft

**PROPOSED CONSTRUCTION**  
MAIL BOXES TO BE  
RELOCATED

**PROPOSED CONSTRUCTION**  
Sidewalk, Conc, 4 inch - 3,350 Ft

**PROPOSED CONSTRUCTION**  
Pav't Mrkg, Polyurea, 4 inch,  
White - 218 Ft

**PROPOSED CONSTRUCTION**  
STA 148+18 (IET EAST ALIGNMENT)  
W11-15 (36"x36")  
W16-9P (36"x18")  
Sign, Type III B - 13.5 Sft  
Post, Steel, 3 lb - 30 Ft

**PROPOSED CONSTRUCTION**  
STA 127+79  
D11-1bP (18"x6")  
M6-1b (12"x9")  
Sign, Type III B - 1.5 Sft  
Post, Steel, 3 lb - 14 Ft

**PROPOSED CONSTRUCTION**  
STA 128+62  
D11-1bP (18"x6")  
M6-1b (12"x9")  
Sign, Type III B - 1.5 Sft  
Post, Steel, 3 lb - 14 Ft

**PROPOSED CONSTRUCTION**  
STA 133+28  
D11-1bP (18"x6")  
M6-3b (12"x9")  
Sign, Type III B - 1.5 Sft  
Post, Steel, 3 lb - 14 Ft

**PROPOSED CONSTRUCTION**  
STA 134+07  
D11-1bP (18"x6")  
M6-3b (12"x9")  
Sign, Type III B - 1.5 Sft  
Post, Steel, 3 lb - 14 Ft

**PROPOSED CONSTRUCTION**  
STA 127+75  
D11-1bP (18"x6")  
M6-1b (12"x9")  
Sign, Type III B - 1.5 Sft  
Post, Steel, 3 lb - 14 Ft

**PROPOSED CONSTRUCTION**  
STA 138+53  
D11-1bP (18"x6")  
M6-1b (12"x9")  
Sign, Type III B - 1.5 Sft  
Post, Steel, 3 lb - 14 Ft

PLAN SUBMITTALS AND CHANGES	
PRELIMINARY PLANS - **NOT FOR CONSTRUCTION**	
DATE	DESCRIPTION
8/5/19	TEAM REVIEW
9-15-19	90% CLIENT SUBMITTAL
10-4-19	TAP GRANT REVISION



PLAN DATE: SEPTEMBER 2019  
PROJECT MGR: RAF  
REVIEWER: TCL  
SCALE: 1" = 50'

**ROWE PROFESSIONAL SERVICES COMPANY**

The Rowe Building  
540 S. Saginaw St., Suite 200  
Flint, MI 48502

O: (810) 341-7500  
F: (810) 341-7573  
www.rowepsc.com

PREPARED FOR  
**CHARTER TOWNSHIP OF OSCODA**  
**IOSCO EXPLORATION TRAIL**  
STA 124+58 TO STA 141+41  
FOOTE SITE VILLAGE CONNECTOR PLAN SHEET

REV:  
SHT# 29 OF 46  
JOB No: 19C0114

PROJECT: 10/7/2019 12:10 PM  
REV: 10/7/2019 12:10 PM  
DRAWING: 19C0114-PCV-CONNECTOR-1.dwg